

JCPT1008ACS Self-propelled Scissor Lifts

SPECIFICATIONS

Size	Metric	British
Max. Working Height A	9.60m	31ft 6in
Max. Platform Height B	7.60m	24ft 11in
Overall Length C	1.88m	6ft 2in
Overall Width D	0.81m	2ft 8in
Overall Height(Rails Up) E	2.30m	7ft 7in
Overall Height(Rails Down) F	1.97m	6ft 6in
Platform Size(Length×Width)	1.73m×0.74m	5ft 8in×2ft 5in
Platform Extension Size G	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.09m/0.016m	4in/1in
Wheelbase H	1.40m	4ft 7in
Turning Radius(Inside/Outside)	0m/1.70m	0m/5ft 7in
Tyres	φ323×125mm	φ323×125mm

Performance


S.W.L	227kg	500lb
S.W.L On Extension	113kg	249lb
Max. Occupants	2	2
Gradeability	25%	25%
Travel Speed(Stowed)	4.5km/h	2.80mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	35/45sec	35/45sec

Weight

Overall Weight	1940kg	4276lb
----------------	--------	--------

Power

Hydraulic Tank	20L	5.3gal
Battery	24V/185Ah	24V/185Ah
Charger	24V/30A	24V/30A
Driving Motor	2×24VAC/0.5kW	2×24VAC/0.5kW
Lifting Motor	24VAC/3.0kW	24VAC/3.0kW

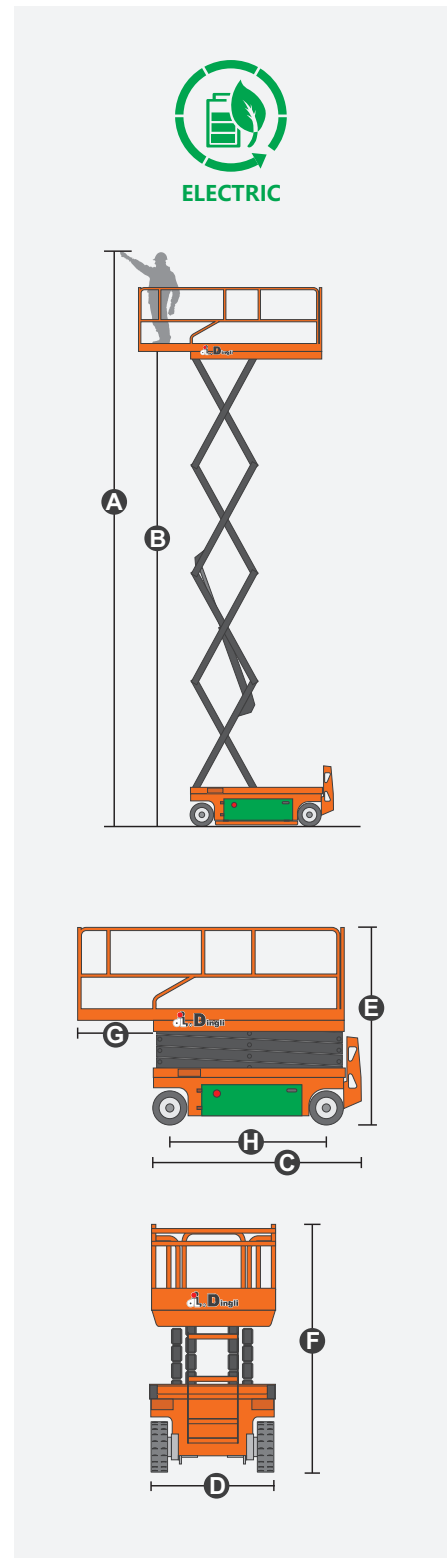

JCPT1008ACS

Self-propelled Scissor Lifts

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button

