

SL2625-E

JCPT2825DC Self-propelled Scissor Lifts


SPECIFICATIONS

Size	Metric	British
Max. Working Height A	28.00m	91ft 10in
Max. Platform Height B	26.00m	85ft 4in
Overall Length C	5.96m	19ft 7in
Overall Width D	2.50m	8ft 2in
Overall Height(Rails Up) E	4.13m	13ft 7in
Overall Height(Rails Down) F	3.19m	10ft 6in
Platform Size(Length×Width)	5.48m×2.45m	18ft×8ft
Platform Extension Size G	2.10m	6ft 11in
Ground Clearance	0.23m	9in
Wheelbase H	4.10m	13ft 5in
Turning Radius(Inside/Outside)	3.50m/6.00m	11ft 6in/19ft 8in
Tyres	355/55D625	355/55D625

Performance		
S.W.L	1000kg	2204lb
S.W.L On Extension	1000kg	2204lb
Max. Occupants	4	4
Gradeability	30%	30%
Travel Speed(Stowed)	3.5km/h	2.17mph
Travel Speed(Raised)	0.3km/h	0.19mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	130/100sec	130/100sec

Weight		
Overall Weight	19750kg	43541lb

Power		
Hydraulic Tank	260L	69gal
Lithium Battery	80V/520Ah	80V/520Ah
Charger	80V/80A	80V/80A
Driving Motor	4×53VAC/2kW	4×53VAC/2kW
Lifting Motor	53VAC/28kW	53VAC/28kW

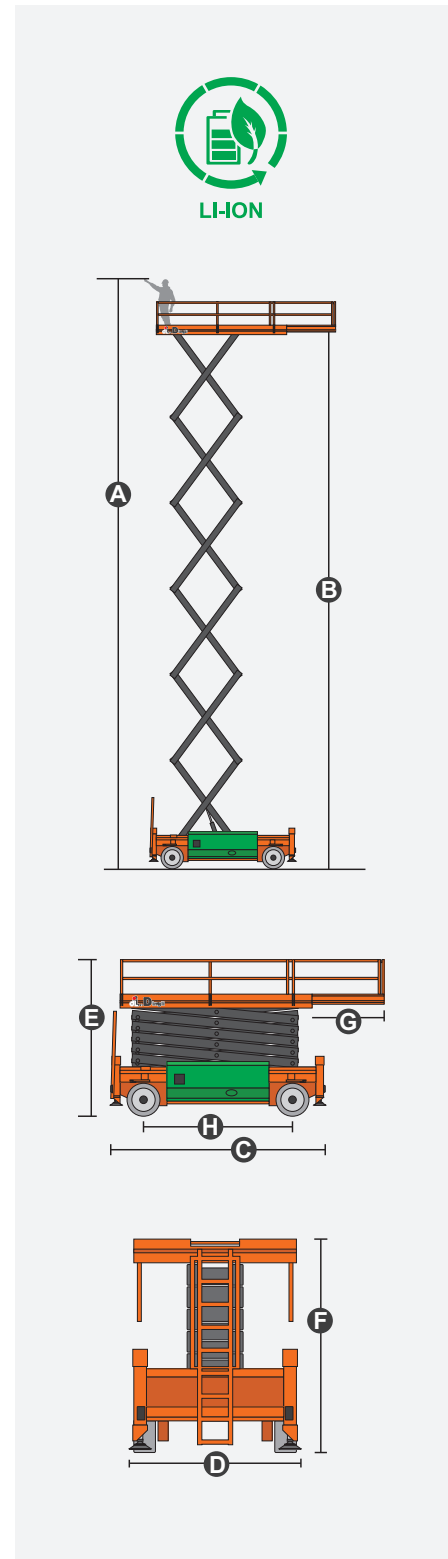

SL2625-E

JCPT2825DC

Self-propelled Scissor Lifts

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Automatic One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height

