

### SL3025-AWD

### JCPT3225RT Self-propelled Scissor Lifts


## SPECIFICATIONS

Size	Metric	British
Max. Working Height <b>A</b>	32.00m	105ft
Max. Platform Height <b>B</b>	30.00m	98ft 5in
Overall Length <b>C</b>	6.73m	22ft 1in
Overall Width <b>D</b>	2.55m	8ft 4in
Overall Height(Rails Up) <b>E</b>	4.13m	13ft 7in
Overall Height(Rails Down) <b>F</b>	3.19m	10ft 6in
Platform Size(Length×Width)	6.20m×2.45m	20ft 4in×8ft
Platform Extension Size <b>G</b>	2.10m	6ft 11in
Ground Clearance	0.20m	8in
Wheelbase <b>H</b>	4.86m	15ft 11in
Turning Radius(Inside/Outside)	3.80m/6.30m	12ft 6in/20ft 8in
Tyres	15-625	15-625

Performance		
S.W.L	1000kg	2204lb
S.W.L On Extension	1000kg	2204lb
Max. Occupants	4	4
Gradeability	40%	40%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.3km/h	0.19mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	150/120sec	150/120sec

Weight		
Overall Weight	23950kg	52800lb

Power		
Diesel Engine	Deutz TD2.9 L4/55kW	Deutz TD2.9 L4/55kW
Diesel Tank	130L	34gal
Hydraulic Tank	260L	69gal

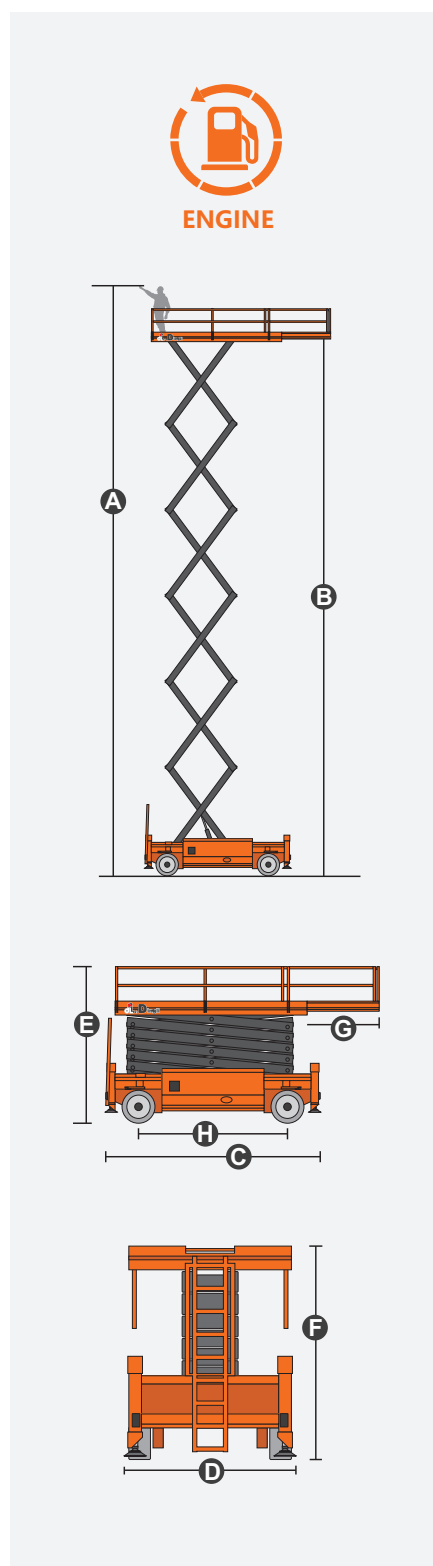

## SL3025-AWD

## JCPT3225RT

Self-propelled Scissor Lifts

### FEATURES

#### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Automatic One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height

